

Protectli Appliance

Protectli Vault Pro VP6650 2x 10G, 4x 2.5G
Intel® i5-1235U

June 28, 2024


Specifications

Model	VP6650
Description	2x 10G, 4x 2.5G Network Port Appliance
Processor	Intel i5-1235U (64 bit, Max 4.4 GHz)
Processor Cores	10
Processor Threads	12
Intel AES-NI	Supported
Virtualization	Intel Vt-x, Vt-d
Network	2x Intel X710-BM2 SFP+, 4x Intel I226V Ethernet RJ-45
Video / Graphics	Intel Iris Xe Graphics, 1x HDMI 1.4, 1x DP 1.4a
Audio	Audio over HDMI
Memory	2x SO-DIMM DDR5-4800, Max 64GB
Storage	1x M.2 2280 NVMe
Optional Storage	2x Internal 2.5" SATA 3.0 SSD
External I/O	2x 10G SFP+, 4x 2.5G Ethernet, RJ-45 1x USB 3.2 Gen 2 Type A, 3x USB 2.0 Type A 1x USB 3.2 Gen 2 Type C with Display Port 1x RJ-45 COM, 1x USB Type C COM Port 1x HDMI 1x Display Port 1x 4FF SIM Holder 6x WiFi/LTE Antenna Mounting Holes 1x 12V DC Power Jack, Threaded
Internal I/O	1x M.2 2280 M-Key PCIe 3.0 x4 (NVMe) 2x SATA Header, 2x SATA Power 1x M.2 2230 E-Key PCIe 3.0 x1 for WiFi 1x M.2 3052 (LTE) 1x USB 2.0 Header 1x Trusted Platform Module Header (2x6 pin) 1x CMOS Reset (2 pin) 1x CPU Fan Header (4 pin) 1x Front Panel Header (9 pin)

BIOS	AMI
Indicators	1x LED Power Button (Blue), 1x LED Power Indicator (Green), 1x LED Disk Activity Indicator (Red), 1x LED Disk Activity Indicator (Yellow)
Power	Input 12V DC, 1x DC Power Jack, Threaded connector
Power Usage	Idle: 12W, Max: 100W
Chassis	Aluminum, Gray
Chassis Dimensions	7.5 x 7 x 3 in, 191 x 178 x 76 mm
Mounting Options	Desktop, VESA Bracket, Optional 1RU Rack Mount
Weight	5 lbs, 2.3 Kg
Shipping Weight	5 lbs 13 oz, 2.6 Kg
Operating Temperature	+14° - +122° F, -10° - +50° C
Operating Humidity	0 – 95% relative humidity, non-condensing
Approvals	UL (Power Supply), FCC Part 15 Class B, CE, RoHS
Country of Origin	Made in China, Assembled in USA, Canada, or Germany
Optional WiFi	1x M.2 2230 E-Key PCIe 802.11ac/a/b/g/n (PCIe)
Optional LTE Cellular	1x M.2 3052 B-Key USB 3.2 Gen 2 (LTE), with 4FF SIM holder
Optional TPM	1x Trusted Platform Module, TPM 2.0

System Features


Front Features

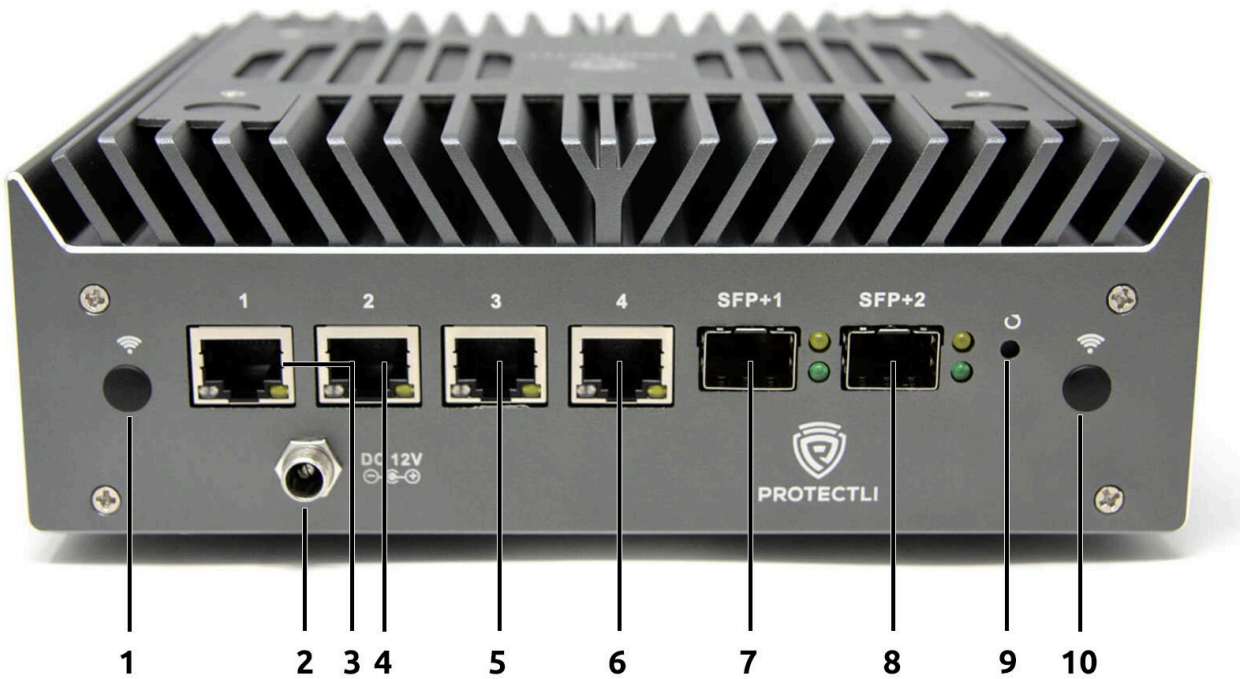

Item #	Object	Description
1, 10	Antenna Ports	Two antenna ports for adding radio antennas (WiFi, LTE, etc.). The ports are covered by plugs while not in use.
2	Power Supply Connector	12V DC threaded barrel connector for the 120W external power supply. Positive rail is the tip, negative is sleeve.
3	Ethernet Port 1	The first 10/100/1000/2500 Mbps Intel® i226 ethernet port.
4	Ethernet Port 2	The second 10/100/1000/2500 Mbps Intel® i226 ethernet port.
5	Ethernet Port 3	The third 10/100/1000/2500 Mbps Intel® i226 ethernet

		port.
6	Ethernet Port 4	The fourth 10/100/1000/2500 Mbps Intel® i226 ethernet port.
7	SFP+ Port 1	The first Intel X710-BM2 10/1GbE SFP+ port.
8	SFP+ Port 2	The second Intel X710-BM2 10/1GbE SFP+ port.
9	Reset Button (recessed)	<p>A momentary switch connected to internal jumpers on the motherboard (see label RSTSW1). Depending on the jumper configuration, this button may perform as either an ACPI Reset or a GPIO button that can be programmed in an OS.</p> <p>For GPIO mode, the implementation is undefined, and may be polled using I2C or ISA registry examination. In Linux, the ISA address 0x0A00 will return 42 when the button is pressed in GPIO mode, 46 when not pressed in GPIO mode. The register will always read 46 if the device is in ACPI Reset mode, as the button's operation is now undefined for GPIO purposes.</p>


Rear Features

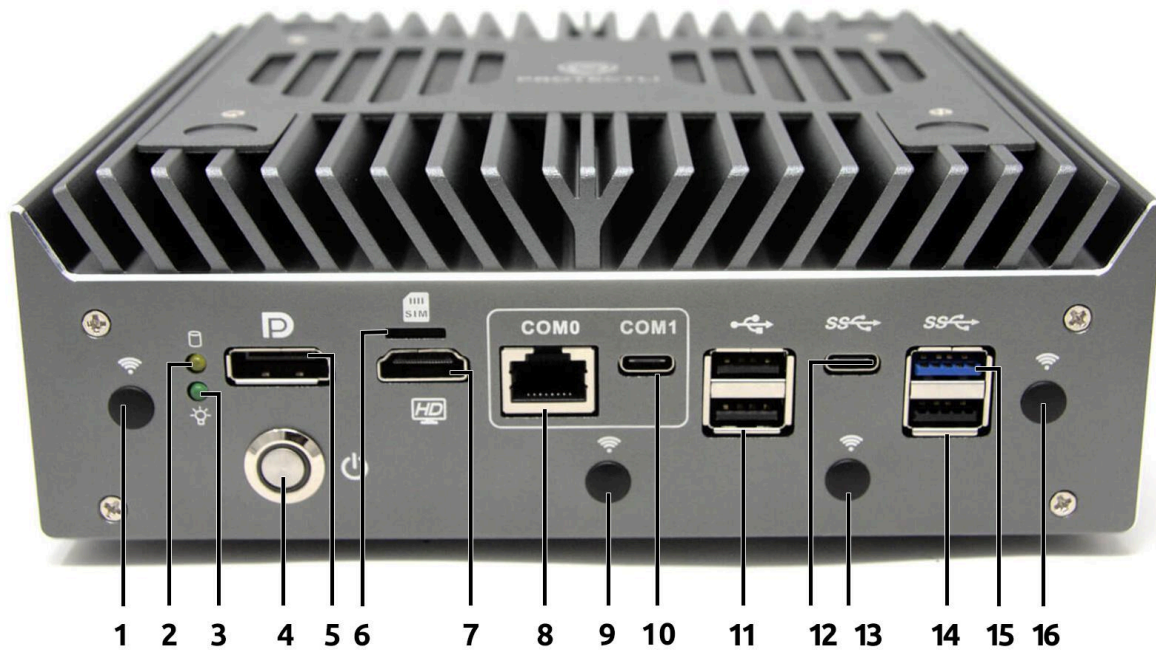

Item #	Object	Description
1, 9, 13, 16	Antenna Ports	Four antenna ports for adding radio antennas (WiFi, LTE, etc.). The ports are covered by plugs while not in use.
2	HDD Activity LED	This amber LED will light up when data activity is detected on an NVMe interface.
3	Power Indicator LED	This LED will stay solid green when the device is powered on.
4	Power Button	Pressing the power Button will power the unit on and illuminate with a blue LED. <i>In OSes configured to handle ACPI signals, pressing the power button initiates a shutdown.</i> <i>Pressing and holding the Power Button for 5 seconds will force the unit to power off.</i>
5	DisplayPort Connector	Video output via DisplayPort.

6	SIM Slot	Nano SIM slot for providing a SIM card to an optional internal cellular modem.
7	HDMI Connector	Video and audio output via HDMI.
8	Serial Console Port	RS232 serial communications via RJ-45. Default port settings: <ul style="list-style-type: none"> ● 115200 baud ● No parity ● 8 databits ● 1 stopbit
10	Serial Console Port	RS232 serial communications via FTDI FT230XS UART, exposed through USB 3.2 Gen 2 Type C connector. Default port settings: <ul style="list-style-type: none"> ● 115200 baud ● No parity ● 8 databits ● 1 stopbit
11	Two USB2 Connectors	USB 2.0 Type-A connectors.
12	USB-C Connector	USB 3.2 Gen 2 Type-C connector with DisplayPort
14	USB2 Connector	USB 2.0 Type-A connector.
15	USB3 Connector	USB 3.2 Gen 2 Type-A connector.

Motherboard Top View

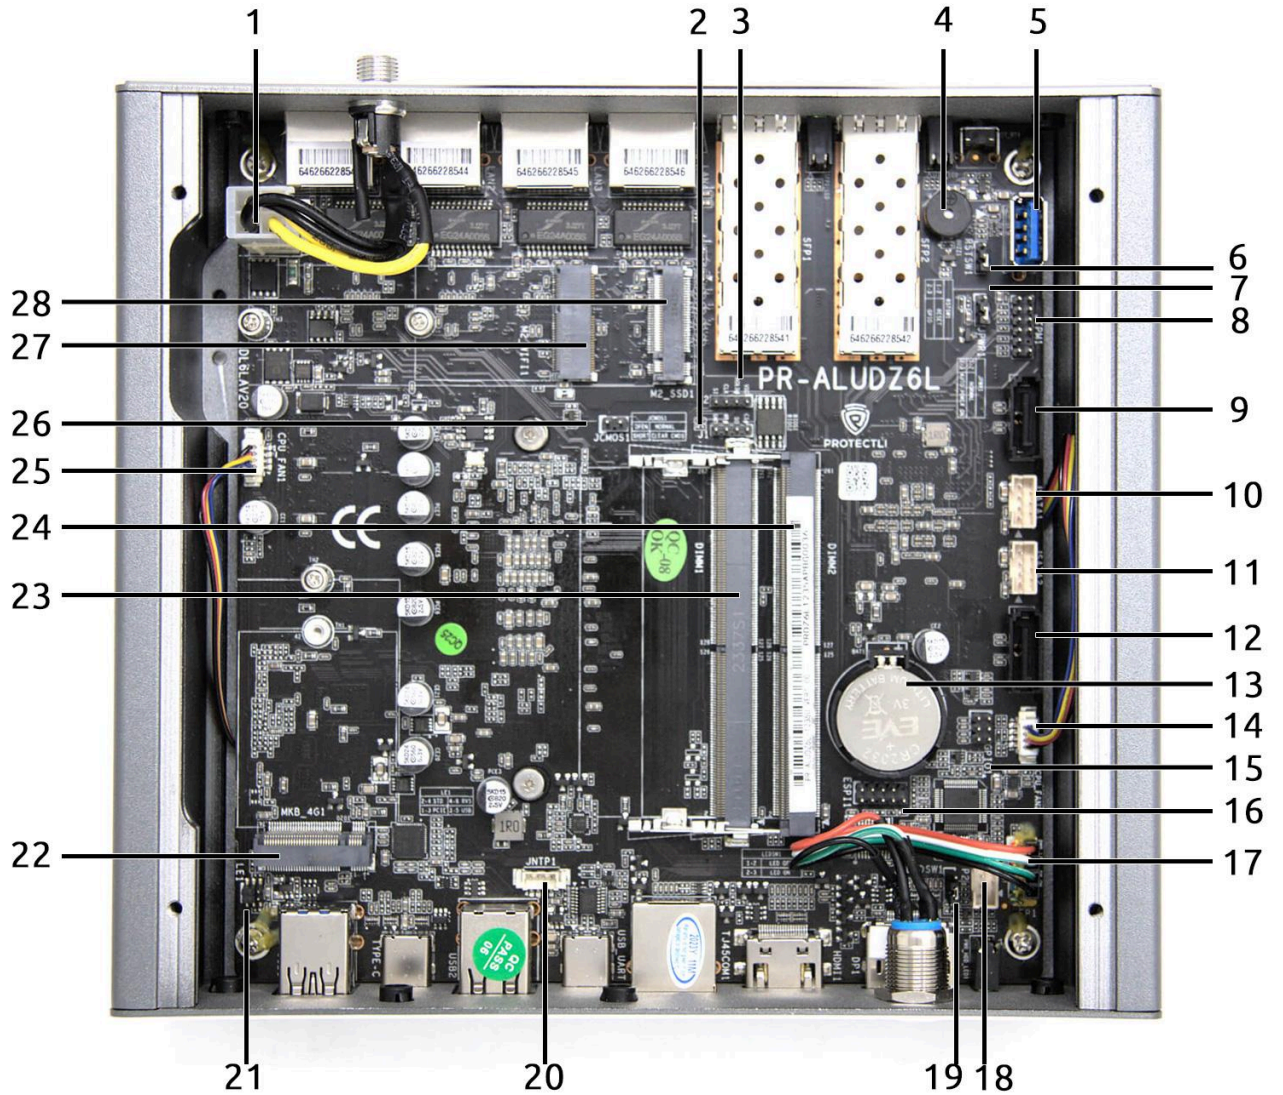

Item #	Object	Label	Description
1	DC IN	DC_IN1	2x2 Molex for +12VDC power.
2	BIOS Programming Headers	J1	One half of BIOS chip jumpers for external programming. 1. VOD 2. HOLD# 3. CLK

			4. SI
3	BIOS Programming Headers	J2	One half of BIOS chip jumpers for external programming. 1. CS# 2. SO 3. WP# 4. GND
4	Buzzer	BUZZ1	PC Speaker.
5	USB3	USB3	Internal USB 3.2 Gen 2 Type-A connector.
6	Reset Button Function Jumper	RSTSW1	Jumper setting determines the functionality of the Reset Button (Front Features, #9) as well as the associated pins on FP1 (Motherboard Top View, #17). • Tied Pins 1-2: ACPI Reset • Tied Pins 2-3: GPIO (Default)
7	Power Restore Jumper	JPWR1	Jumper setting determines system state after power is restored after experiencing power loss. • Tied Pins 1-2: Remain powered off • Tied Pins 2-3: Automatic power on (Default)
8	TPM	JTPM1	Trusted Platform Module header for a TPM2.0 hardware device.
9	SATA Data Connector	SATA1	SATA III data connector. Recommended for additional storage, such as a 2.5" SATA SSD.
10	SATA Power Connector	JSATA1	SATA power connector for additional storage.
11	SATA Data Connector	JSATA2	SATA III data connector. Recommended for additional storage, such as a 2.5" SATA SSD.
12	SATA Power Connector	SATA2	SATA power connector for additional storage.
13	CMOS Battery	BAT1	3V CR2032.
14	CPU Fan Header	CPU_FAN2	Four-pin PicoBlade-compatible header for included PWM CPU fan located on chassis.
15	GPIO	GPIO1	General Purpose I/O header.
16	ESPI	ESPI1	eSPI header for BIOS chip flashing.
17	Front Panel Header	FP1	Internal header for adding external device controls and indicators featured through the front panel, such as power button, reset button, activity LEDs, etc.

18	Front Panel Header	FP2	<p>Additional headers for “Front-Panel-like” control. These pins could be used by an auxiliary device to power on, power off, and monitor unit power state.</p> <p>Pin 1 is located closest to the CMOS battery (#13).</p> <table border="1" data-bbox="654 478 1414 537"> <tr> <td data-bbox="654 478 846 537">Pin 1: LED +</td> <td data-bbox="846 478 1039 537">Pin 2: LED -</td> <td data-bbox="1039 478 1230 537">Pin 3: Power -</td> <td data-bbox="1230 478 1414 537">Pin 4: Power +</td> </tr> </table> <p>Monitoring pins 1 and 2 will dictate if the unit is powered on. Measurement between 1VDC and 3.5VDC indicated the unit is on (S0), 0VDC is powered off (S5).</p> <p>Shorting pins 3 and 4 will emulate an ACPI power button.</p> <ul style="list-style-type: none"> Shorting the connection for any duration will send an ACPI command to either power on (S0) if in a powered-off state, or as an ACPI_SHUTDOWN event to be handled by the OS. Shorting the connection for over 5 seconds will force the system to enter a soft-off state (S5). <p>The included “SSD Cable Kit” for mounting an additional 2.5” SSD contains a power cable that can be repurposed into a breakout connector as the FP2 and JSATA1/JSATA2 (#10 and #12 respectively) are the same connector size.</p>	Pin 1: LED +	Pin 2: LED -	Pin 3: Power -	Pin 4: Power +
Pin 1: LED +	Pin 2: LED -	Pin 3: Power -	Pin 4: Power +				
19	LED Control Jumper	LEDSW1	<p>Jumper setting determines the operation of chassis LEDs, such as Power Indicator LED (Back Features, #3)</p> <ul style="list-style-type: none"> Tied Pins 1-2: LEDs Off Tied Pins 2-3: LEDs On (Default) 				
20	External Time Header	JNTP1	<p>Header for use with an external time device, such as a GPS receiver. Serial data is processed by the TPS65994AD Dual Port USB Type-C® and USB PD Controller by way of a slave I²C interface.</p> <ol style="list-style-type: none"> Serial data Serial clock +5 VDC GND 				
21	Lane Configuration	LE1	<p>Jumper setting determines the operation mode of MKB_4G1 (#22). Two jumpers are included and will dictate the mode.</p> <p>One jumper is used to configure the operation mode:</p> <ul style="list-style-type: none"> Jumped Pins 1-3: PCIe Mode Jumped Pins 3-5: USB 3.2 Mode <p>One jumper is used to configure voltage settings defined for vendor-reserved use cases. Such examples include specific M.2</p>				

			<p>modules that require voltages to be present on certain pins to modify the operation mode of the M.2 module itself.</p> <ul style="list-style-type: none"> • Jumped Pins 2-4: No voltage at pins 20 and 22. • Jumped Pins 4-6: 1.83V at pin 20 and 3.3V at pin 22. <p>Factory default setting is to jump pins 1-3 and 2-4, placing the MKB_4G1 (#22) M.2 port in a standard PCIe Mode.</p> <p>The following table maps the pins in the same orientation of the photo above. Pin 1 is indicated by a white arrow printed on the motherboard.</p> <table border="1" data-bbox="651 695 1016 814"> <tr> <td>Pin 2</td> <td>Pin 4</td> <td>Pin 6</td> </tr> <tr> <td>Pin 1</td> <td>Pin 3</td> <td>Pin 5</td> </tr> </table>	Pin 2	Pin 4	Pin 6	Pin 1	Pin 3	Pin 5
Pin 2	Pin 4	Pin 6							
Pin 1	Pin 3	Pin 5							
22	LTE Expansion Slot	MKB_4G1	Connector uses the designated protocol based on the LE1 Jumper (#21) via an M.2 3052 B-Key. Designed for Protectli WiFi and LTE modems, but is not limited in its capabilities.						
23	Memory Slot	DIMM1	DDR5 SODIMM.						
24	Memory Slot	DIMM2	DDR5 SODIMM.						
25	CPU Fan Header	CPU_FAN1	Four-pin PicoBlade-compatible header for included PWM CPU fan located on chassis.						
26	NVRAM Reset Jumper	JCMOS1	Shorting this jumper while the CMOS battery is connected will reset the BIOS NVRAM.						
25	BIOS Programming Headers	J1	One half of BIOS chip jumpers for external programming. <ol style="list-style-type: none"> 5. VOD 6. HOLD# 7. CLK 8. SI 						
26	BIOS Programming Headers	J2	One half of BIOS chip jumpers for external programming. <ol style="list-style-type: none"> 5. CS# 6. SO 7. WP# 8. GND 						
27	WiFi Expansion Slot	M2_WIFI1	Connector uses PCIe 3.0 x1 protocol over an M.2 Key E socket. Designed for Protectli WiFi modules, but is not limited in its capabilities.						
28	M.2 NVMe	M2_SSD1	Connector uses PCIe 3.0 x4 protocol over an M.2 M-Key socket. It						

	Connector	is designed for an NVMe storage device, but is otherwise a functional PCIe port.
--	-----------	--

Measurement View



Document History

2024-06-28

- Clarified PCI and USB specifications such as speed, protocol, etc.

2024-05-16

- Added additional details regarding the serial port FTDI driver.
- Added details about the Intel X710 SFP+ chipset.
- Added details about how RSTSW1 operation modes affect Front Panel item #9: “Reset Button (recessed)”
- Clarified LTE and/or WiFi slot naming schemes
- Clarified threading on barrel connector
- Updated FP2 (#18 Motherboard View) connector properties and pinout information

2024-04-29

- Initial document